



Intermec

## Product Profile

- Dual-diode laser engine allows close-in and extra long distance scanning.
- Aiming beam feature for accurate scanning.
- Durable Sabre design withstands the harshest environments.
- Three-year warranty guarantees customer satisfaction.
- Free EasySet configuration utility makes initial scanner set up a snap!



### SABRE® 1553 XLR SCANNER

Intermec reaches new heights with the Sabre 1553 Extra Long Range (XLR) scanner. Able to scan a 100 mil (2.54mm) bar code from as far away as 35 feet, the 1553 XLR offers more than any other long range Intermec product.

Intermec's 1553 XLR scanner has far reaching performance. Its dual-diode laser engine lets you scan as close as 4 inches (10.2 cm.) to as far as 35 feet (10.7 meters) from a bar code using a single scanner. No need to buy multiple scanners to handle a variety of scanning distances.

The Sabre 1553 is built to last. The Sabre line of scanners has proven that it excels in harsh environments, whether it's intense forklift vibration in the manufacturing plant or distribution center, or extreme field conditions like rain, heat, cold, and dust. With the 1553

XLR, we've kept the rugged Sabre design that set the standard for durability, performance, and comfort. The 1553 XLR boasts a rubber overmold, protected window, cable strain relief, and additional features that reduce shock and protect electrical components from rough treatment and tough conditions.

Setting up the 1553 XLR scanner is a snap with EasySet – a software utility for quick and easy configuration of Intermec scanners. No need to page through thick manuals to turn on application features. With a point and click you can print a barcode that configures your scanner with a single scan. Even better, every 1553 XLR comes with EasySet configuration software free of charge.

If you need to scan the tough to reach spots, reach for Sabre 1553 XLR—your long range scanning solution.

Intermec

**Physical Description**

The Sabre 1553 Extra Long Range Industrial Scanner

**Product Contents**

Scanner, EasySet and Quick Reference Card

**Warranty**

3 years

**Physical Characteristics**

**Length:** 12.7 cm (5.0")

**Height:** 17.3 cm (6.8")

**Width:** 8.4 cm (3.3")

**Weight:** 294 g (10.4 oz.)

**Power Requirements**

**Voltage:** +4.5 to 12V

**Maximum Operating Current:** 215mA at 5.0V

**Terminal Connectivity**

RS-232, USB, Keyboard Wedge, Wand Emulation, Laser Emulation depending on application and cable. Consult the EasySet "terminal selector" for terminal support and cable availability information.

**Bar Code Symbolologies**

UPC (E&A), EAN, Code 11, Code 39, Code 128, UCC EAN 128, ISBN, ISBT, Interleaved 2 of 5, Codabar, CXode 93, MSI, Plessey, Telepen, ISBT 128

**Scanning Performance**

**Scan rate:** 35+5 scans/sec

**Minimum X dimension:** 10 mil

**Depth of field:** 10cm to 10.6m (4 to 35 ft)

**Scan Angles:** 48%

**PCR:** Minimum 40% reflective difference

**Skew:** + 45 degrees

**Pitch:** + 45 degrees

**Optical Parameter:** Visible laser diode: 670 nm

**Scan Range**

10 mil / 0.25 mm:	10.2 cm to 33 cm	4" to 13"
15 mil / 0.38 mm:	10.2 cm to 1.4m	4" to 4.5'
20 mil / 0.5 mm:	10.2 cm to 1.7 m	4" to 5.5'
40 mil / 1.0 mm:	30.5 cm to 3.4m	12" to 11'
55 mil / 1.4 mm:	.9 m to 4.6 m	3' to 15'
70 mil / 1.8 mm retro-reflective:	2.0 m to 7.6 m	6.5' to 25'
100 mil / 2.54 mm retro-reflective:	2.1 m to 10.7 m	7.5' to 35'

\*Near and far range values reflect typical reading distances experienced by most users on Code 39.

**Accessories**

Vehicle mount holder, wall mount, holder, holster and belt.

**Environmental**

**Operating Temperature:** -30 C to -50 C (-22 F to 122 F)

**Storage Temperature:** -40 C to -70 C (-40 F to 158 F)

**Humidity:** 0-95% non condensing

**Shock and Vibration:** Class 3 SAE off-road vehicle specification Vibration Rain and

Dust Resistance: IP54


**Drop Survival:** 26 drops from 6 feet to concrete

**Regulatory Approvals**

**ESD:** Conforms to 15KV rating per IEC 801-2

**EMI Emissions:** Conforms to Class B FCC Part 15, CISPR Publication 22 Class B, EN55022 Class B

**Approvals:** UL & cUL listed, TUV Rheinland GS licensed, CE marked

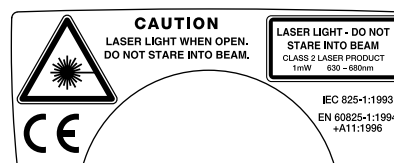

Intermec reserves the right to make changes without notice to any products herein for any reason at any time, including but not limited to improving the reliability, form, fit, function, or design. Please contact Intermec for current price list and availability.

**North America**

Corporate Headquarters  
6001 36<sup>th</sup> Avenue West  
Everett, Washington 98203  
tel: 425.348.2600  
fax: 425.355.9551

Systems & Solutions  
550 2<sup>nd</sup> Street S.E.  
Cedar Rapids, Iowa 52401  
tel: 319.369.3100  
fax: 319.369.3453

Media Supplies  
9290 Le Saint Drive  
Fairfield, Ohio 45014  
tel: 513.874.5882  
fax: 513.874.8487

**Europe/  
Middle East & Africa**

Headquarters  
Sovereign House  
Vestern Road  
Reading, Berkshire RG1 8BT  
United Kingdom  
tel: +44.118.987.9400  
fax: +44.118.987.9401

**Asia**

Hong Kong  
2602 Convention Plaza  
Office Tower  
1 Harbor Road  
Wanchai, Hong Kong  
tel: 852.2574.9777  
fax: 852.2574.9725

**Singapore**

25-16 International Plaza  
10 Anson Road, 079903  
tel: 65.324.8391  
fax: 65.324.8393

**Australia**

Level 7, 200 Pacific Highway  
Crowns Nest NSW 2065  
Australia  
tel: 61.2.9492.4400  
fax: 61.2.9954.6300

**South America & Mexico**

Latin America Headquarters  
17921 B Skypark Circle  
Irvine, California 92614  
tel: 949.442.9393  
fax: 949.757.1687

**Mexico**

Tamulipas 141, Primero Piso  
06140 Mexico, D.F.  
tel: 525.55.211.1919  
fax: 525.55.211.8121

**Worldwide**

**Fax Document Retrieval Service**  
800.755.5505  
(North America Only)  
tel: 650.556.8447

**Internet**

www.intermec.com

**Sales**

800.347.2636  
(toll free in N.A.)  
tel: 425.348.2726

**Service and Support**

800.755.5505  
(toll free in N.A.)  
tel: 425.356.1799

Copyright © 2002 Intermec Technologies Corporation. All rights reserved. Intermec is a registered trademark of Intermec Technologies Corporation. All other trademarks are the property of their respective owners. Printed in the U.S.A. 611004-01C 08/02

In a continuing effort to improve our products, Intermec Technologies Corporation reserves the right to change specifications and features without prior notice.