

RFID Tag



- Rugged encapsulation for harsh environments
- Consistent UHF range performance worldwide
- Gen 2 and ISO 18000-6B versions
- Superior performance on a variety of materials
- Reusable for lower cost per use

UHF Small Rigid RFID Tag

Intermec's Small Rigid Tag (SRT) is a truly passive UHF RFID tag designed for superior performance on a variety of surfaces. The tag available in both EPC Global Class 1, Generation 2 (Gen 2) and ISO 18000-6B protocols, combines an impressive range with a rugged yet compact design, suitable for harsh industrial applications, and survival in application temperatures up to 250° F (121° C). Additionally, the small rigid tags have a wide band antenna design, which allows for a single tag to be used virtually anywhere in the world and on a variety of surfaces, including metal, plastic and wood.

The Small Rigid Tags are ideal for industrial applications where ruggedness, chemical resistance or higher temperature ratings are required and where tag size is an important consideration.

Typical applications include:

- Reusable plastic containers (RPC)
- Metal cages
- Pallets
- Unit Loading Devices (ULD)
- Gas cylinders
- Beer kegs & other commercial beverage containers
- Hazmat containers
- Chemical containers

Attachment Methods

The tags can be attached using screws, rivets, double-sided adhesive strips, or a variety of other methods appropriate for the application. Each tag has two mounting holes for up to #6 hardware (not included).

Reader Compatibility

Intermec manufactures a complete line of readers that are compatible with the small Rigid Tags as indicated in the table below.

Tag Type	Intermec Reader Models
EPC Global Gen 2	IP4 Hand-Held Reader IF4 Fixed Serial Reader IF5 Fixed Network Reader IV7 Vehicle Mount Reader
ISO 18000-6B	IP3 Hand-Held Reader IP4 Hand-Held Reader Pennsylvania Fixed Serial Reader IF4 Fixed Serial Reader IF5 Fixed Network Reader IV7 Vehicle Mount Reader

Competitive readers conforming to the Gen 2 and ISO 18000-6B protocols can also read the tags conforming to these respective protocols.

Temperature Ratings

The new Intermec Rigid Tags are rated for applications with temperatures ranging from -40° to 250° F (-40° to 121° C).

Chemical Resistance


The Rigid Tags are tested for resistance to the following chemicals.

- Machining oil and fluid (long-term exposure)
- Gasoline
- Motor oil
- Methyl Ethyl Ketone (MEK)
- Isopropyl alcohol
- Methyl alcohol
- Mineral spirits
- Acetone
- Kerosene

Optimal Frequencies of Operation

- ISO 18000-6B: 860 MHz to 930 MHz
- EPCglobal Gen 2: 860 MHz to 960 MHz

Read Range Performance of Small Gen 2 Rigid Tag

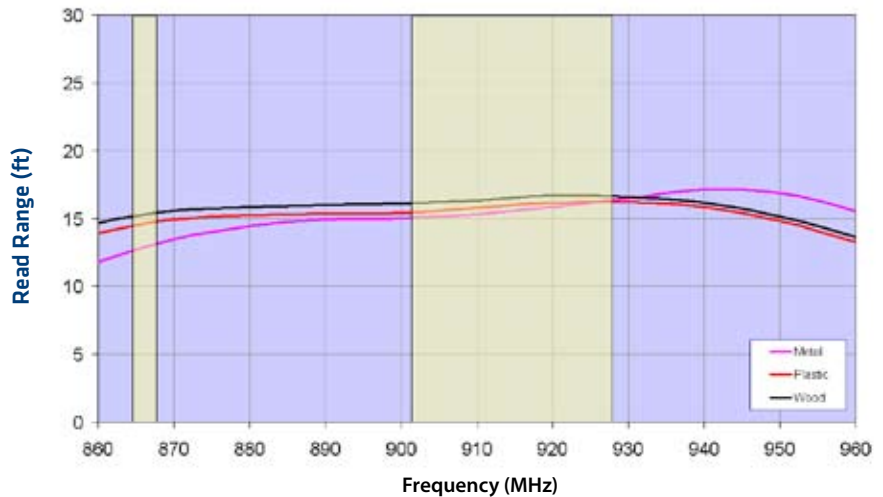


Note

Actual range performance may vary depending on power output, temperature and other environmental factors.

Size

1.22 in x 3.11 in (3.10 cm x 7.90 cm)

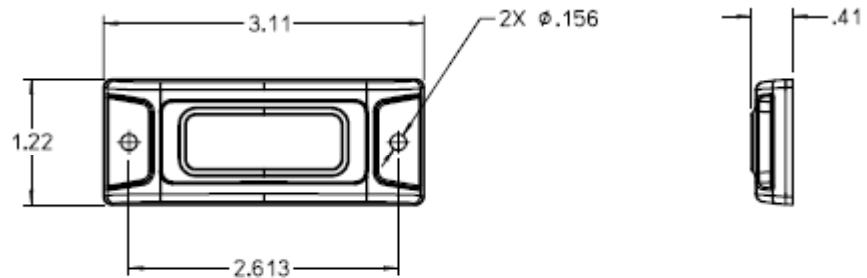

Available Silicon & Memory Size

Air Interface	Silicon Type	Memory Size	Comments
EPC Global Class 1 Generation 2	Impinj Monza	96 bits	Unprogrammed
ISO 18000-6B	Philips UCODE HSL	2048 bits	Includes pre-programmed and locked unique ID per ISO 18000-6B specification

North America

Corporate Headquarters

6001 36th Avenue West
Everett, Washington 98203
Phone: (425) 348-2600
Fax: (425) 355-9551

South America & Mexico Headquarters Office

Newport Beach, California
Phone: (949) 955-0785
Fax: (949) 756-8782

Europe/Middle East & Africa Headquarters Office

Reading, United Kingdom
Phone: +44 118 923 0800
Fax: +44 118 923 0801

Asia Pacific

Headquarters Office
Singapore
Phone: +65 6303 2100
Fax: +65 6303 2199

Internet

www.intermec.com
Worldwide Locations:
www.intermec.com/locations

Sales

Toll Free NA: (800) 934-3163
Toll in NA: (425) 348-2726
Freephone ROW: 00 800 4488 8844
Toll ROW: +44 134 435 0296

OEM Sales

Phone: (425) 348-2762

Media Sales

Phone: (513) 874-5882

Customer Service and Support

Toll Free NA: (800) 755-5505
Toll in NA: (425) 356-1799

Copyright © 2007 Intermec Technologies Corporation. All rights reserved. Intermec is a registered trademark of Intermec Technologies Corporation. All other trademarks are the property of their respective owners. Printed in the U.S.A. 611767-01A 03/07

In a continuing effort to improve our products, Intermec Technologies Corporation reserves the right to change specifications and features without prior notice.

